


Conduit Endstops

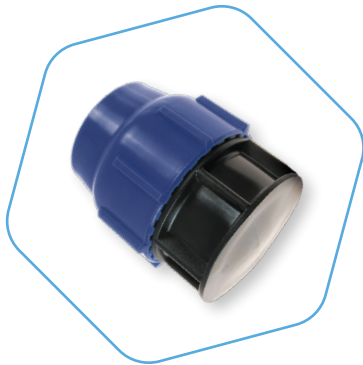

DESCRIPTION

Conduit Endstops provide a closure for ducts. Available for outer diameters ranging from 20 mm to 63 mm.

APPLICATION

For use with Conduit HDPE in direct-buried or direct-install applications.

KEY TECHNICAL PARAMETERS

Material

Body:	Polypropylene (PP), high-grade copolymer
Grip ring:	Polyacetal
O-ring:	Nitrile Butadiene Rubber (NBR)
Nut Material:	Polypropylene (PP), high-grade copolymer

Temperature

Working:	-15° C to +45° C
Installation:	-15° C to +45° C

Standart Compliance


General:	EN 10226-1
----------	------------

Others

UV Resistance:	NO
Lifetime Expectancy:	25 years
Impact resistance:	10 J

Pressure

Short term:	25 bars
Long term:	16 bars (PN16)

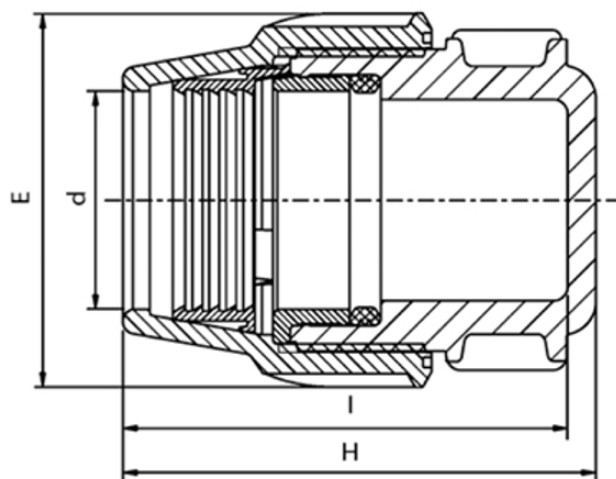

d (mm)	E (mm)	H (mm)	I (mm)
20	48	79	74
25	54	82	77
32	64	92	87
40	82	102	97
50	96	121	114
63	113	145	122

PRODUCT VARIATIONS

Description	Part #
Conduit Endstop 20 mm	20030037
Conduit Endstop 25 mm	20030038
Conduit Endstop 32 mm	20040038
Conduit Endstop 40 mm	20030039
Conduit Endstop 50 mm	20020233
Conduit Endstop 63 mm	20060421